

Natural Touch 10.0


Product description

P D16

Stand: 05.17




System

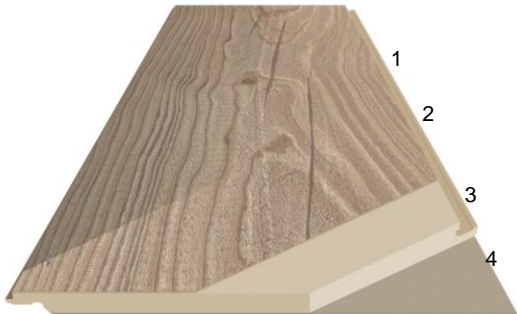



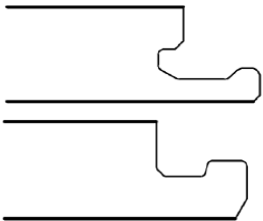

- 1 high-grade durable overlay
- 2 impregnated decorative paper
- 3 HDF Optima
- 4 balancer

Profile










Kaindl Loc
profile longitudinal

Fold Down
profile transversal

Tests	Flooring ¹ Symbols	Results
Panel dimension		1383x159x10mm
Service category per Standard per	EN 685 EN 13329 	33
Abrasion resistance	EN 13329 	AC5
Impact resistance	EN 13329 	IC2
Formaldehyde emission of the substrate before coating	EN 120 DIBT- Richtlinie 100 	E1 [Europe]
Formaldehyde emission	EN 717-1	< 0,1 ppm
	EN 717-2	< 3,5 mg/h m ²

All values are approximate values - fluctuations cannot be absolutely ruled out.

Floorconstruction		GREENGUARD GOLD
Formaldehyde emission	CARB	CARB Phase 2
Thickness swelling / edge swelling	EN 13329	 < 18 %
Thermal conductivity	ISO 8302	 0,0930 m ² .K/W
Moisture residue HDF	EN 322	4 - 7 %
Resistance to cigarette burns	EN 438-2.18	 grade 4
Light fastness	EN ISO 105-B02 EN 20105-A02	 not worse than 6 Blue wool scale not worse than 4 Grey scale
Lifting resistance	EN 13329	≥ 1 N/mm ²
Cross tensile strength	EN 319	> 1 N/mm ²
Resistance to stains	EN 438-2.15	 groups 1-2 grade 5 group 3 grade 4
Combustibility	EN13501-1	 Cfl , s1
Sliding friction μ	EN 13893	 ≥ 0,3
Dimensional variants after changes in relative humidity	EN 13329	length and width ≤ 0,9 mm
Straightness of the panels	EN 13329	≤ 0,30 mm / m
Hight difference between elements	EN 13329	maximum ≤ 0,15 mm average ≤ 0,10 mm
Squared elements	EN 13329	≤ 0,2 mm / panel width
Flatness of the element width	EN 13329	concave ≤ 0,2 mm convex ≤ 0,3 mm
Flatness of the element length	EN 13329	concave ≤ 7 mm convex ≤ 14 mm
System pattern matching widthwise		+/- 2mm
Ship's planking matching widthwise		+/- 4mm

1)Information under www.floorsymbols.com